


Project



FEATURES

Dallas LED downlights are available in 2" and 4" model sizes with round or square trim. Refracted optic lens with medium beam angle and 90 CRI delivers a soft uniform light with vivid color. Select from 3000K, 4000K or 5000K using the on-board CCT selector. Ideal for ambient or accent lighting in residential, hospitality, commercial and retail stores. Easy installation and service from below ceiling. Air tight, damp location and IC rated for use in insulated ceilings.

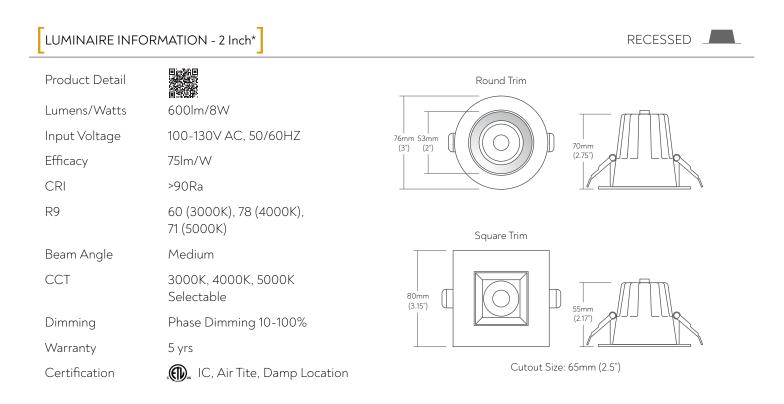







## LUMINAIRE INFORMATION - 4 Inch\*

Product Detail		Round Trim
Lumens/Watts	1100lm/12W	120mm 82mm (4.75') (3.25')
Input Voltage	100-130V AC, 50/60HZ	
Efficacy	90lm/W	
CRI	>90Ra	
R9	60 (3000K), 74 (4000K), 66 (5000K)	Square Trim
Beam Angle	Medium	
ССТ	3000K, 4000K, 5000K Selectable	122mm (4.8")
Dimming	Phase Dimming 10-100%	
Warranty	5 yrs	
Certification	🗶 IC, Air Tite, Damp Location	Cutout Size: 105mm (4")

## EXTERNAL DRIVER/ON-BOARD CCT CHANGE

THE LED LIGHTING SOURCE

SGIONELighting.com

