


PARIS DOWNLIGHTS

3", 4", 5" Euro Collection

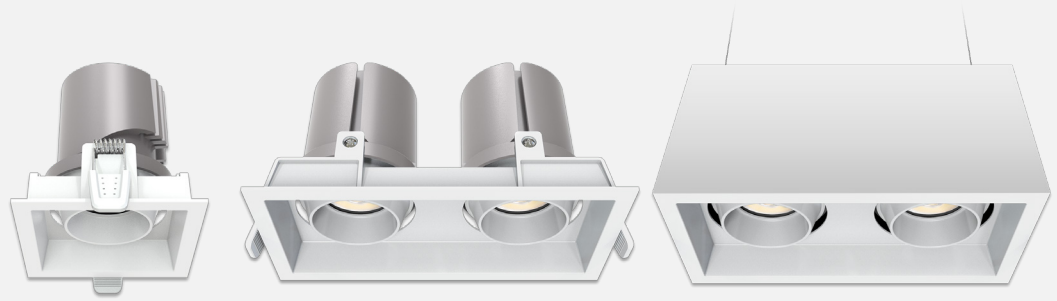

FEATURES

Paris downlight multiples with glare free design prohibits direct view of the LED creating high visual comfort. Features dual 30° gimbals for precision aiming with single head and double head models. Modular design with separate mounting ring and light engine allows for easy installation, replacement and maintenance from below ceiling. Enclosure available for suspended option. Ideal for ambient or accent lighting in residential, hospitality, commercial and retail stores.

LUMINAIRE INFORMATION


RECESSED



Product Detail




Lumens/Watts	1100lm/15W ¹ - 3 Inch
(Single Head, 3000K)	1700lm/20W ² - 4 Inch
	2000lm/25W ² - 4 Inch
	2400lm/30W ³ - 6 Inch
	2800lm/35W ³ - 6 Inch
Input Voltage	120-277V
Efficacy	Up to 90lm/W
CRI	>90Ra
Beam Angle	38° (Standard) , 24°, 55°
CCT	3000K, 3500K, 4000K
Dimming	0-10V (20W-25W Standard), Phase Dimming 10-100% (15W Standard), Dual (Consult Factory)
Ingress Protection	IP20 Dry Location
Warranty	5 yrs
Certification	

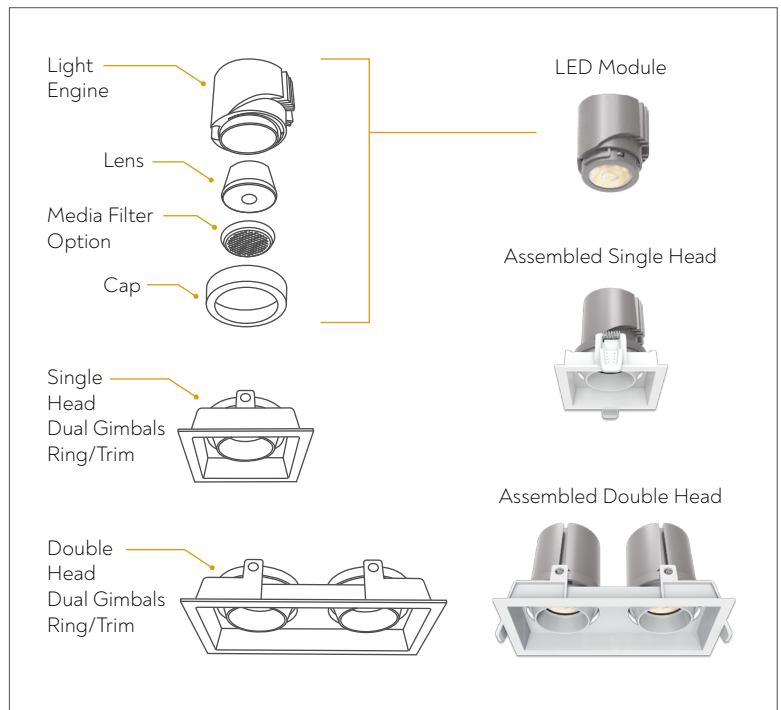


DIMENSIONS

Euro Collection / Model	L x W	H	Cutout Size L x W
EURO3 / 3 Inch* Paris Single Head PAR3-1	90x90mm (3.54"x3.54")	95.5mm (3.76")	80x80mm (3.15"x3.15")
EURO3 / 3 Inch* Paris Double Head PAR3-2	175x90mm (6.89"x3.54")	95.5mm (3.76")	165x80mm (6.5"x3.15")
EURO4 / 4 Inch* Paris Single Head PAR4-1	110x110mm (4.33"x4.33")	112mm (4.42")	95x95mm (3.74"x3.74")
EURO4 / 4 Inch* Paris Double Head PAR4-2	220x110mm (8.66"x4.33")	112mm (4.42")	205x95mm (8.07"x3.74")
EURO6 / 6 Inch* Paris Single Head PAR6-1	130x130mm (5.12"x5.12")	140mm (5.51")	115x115mm (4.53"x4.53")
EURO6 / 6 Inch* Paris Double Head PAR6-2	266x130mm (10.47"x5.12")	140mm (5.51")	245x115mm (9.65"x4.53")

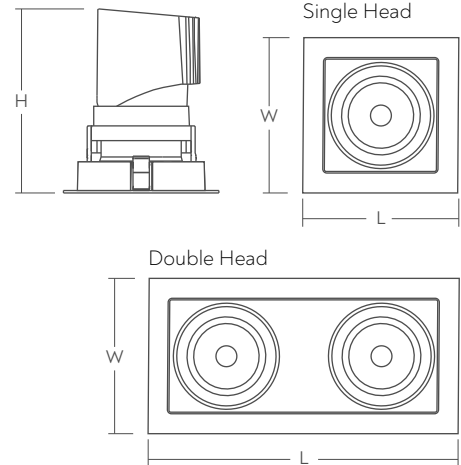

NOTE: Double head requires 2x drivers

DRIVER ENCLOSURE

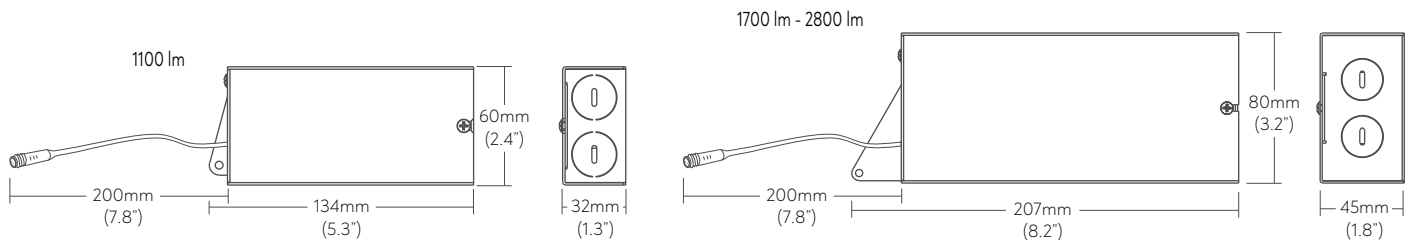

ORDER CODE

MODULE					DRIVER	
COLLECTION	BEAM ANGLE	CCT	90 CRI	LUMENS	DIMMING	VOLTAGE
EURO3 - PAR3 EURO4 - PAR4 EURO6 - PAR6	38D - 38° (Standard) 24D - 24° 55D - 55°	30K - 3000K 35K - 3500K 40K - 4000K Consult factory for other CCT	90 - 90CRI	11 - 1100lm ¹ (3" Standard) 20 - 2000lm ² (4" Standard) 17 - 1700lm ² 24 - 2400lm ³ 28 - 2800lm ³	V - 0-10V DIMMING (20W-35W) T - PHASE DIMMING (15W ONLY) X - DUAL 0-10V & PHASE DIMMING (Consult Factory)	UNV - 120-277V * Nominal size 1. Available for 3 inch model only 2. Available for 4 inch model only 3. Available for 6 inch model only 4. One driver required for single head 5. Two drivers required for double head 6. Available for 2 head model only

TRIM					OPTIONS		
MODEL	TRIM	TRIM INTERIOR	TRIM FINISH	# OF HEADS	MEDIA FILTER	SUSPENDED ENCLOSURE	NEW CONSTRUCTION PLATFORM
PAR3 - PARIS 3 INCH* PAR4 - PARIS 4 INCH* PAR6 - PARIS 6 INCH*	SQ - SQUARE	WH - WHITE (Standard) BK - BLACK Consult factory for other colours	WH - WHITE (Standard) BK - BLACK Consult factory for other colours	1 - 1 HEAD* 2 - 2 HEADS*	HC - HONEYCOMB SL - SOFT LENS	SEWH - WHITE* SEBK - BLACK*	(Blank) - NONE NCS1 - ADJUSTABLE 2" - 6" SQUARE NCS2 - FIXED 3", 4" PARIS DOUBLE HEAD

